

# Europa V2/64(96)

12", 2-Way,  
Full-Range Loudspeaker

ENNE



## Key Feature

- 1" high frequency compression driver
- 12" low frequency woofer
- 60° x 40° and 90° x 60° rotatable horn
- Low power, can be used as Main PA for medium system or fill speaker for large system
- Bi-Amp or Passive mode selectable
- 10 x M10 Suspension points

## Description

ENNE Europa Installation Series Loudspeaker is a complete line for installation PA system. The range consists of 10 different full-range loudspeaker and 3 subwoofer. For greater flexibility the dual 6", dual 8", 12" and 15" full range cabinets are available depending on the coverage pattern and power required for the installation and for sub-bass 18" and dual 18" are also available. The Europa Series contains the performance and features that meet the needs of contractors and consultants alike.

All parts of Europa Series' component have been carefully selected, designed and optimized to ensure perfect sound reinforcement. Designers follows the most cost-effective design principles and chooses the best quality speaker unites from the world's top manufacturers. All units are rigorously tested in order to ensure the stability of the product. Therefore, Europa Series offers a dramatic price/performance advantage over competitive products.

Europa V2 is designed for medium installation sound reinforcement system, high sensitivity, high output and high sound quality. With compact enclosure structure, V2 delivers smooth, clear human voice and excellent Mid-Low response.

V2 is a 2-way, low power, full-range loudspeaker. It has a 1" high frequency compression driver and a 12" low frequency woofer. V2/64 has 60° x 40° coverage pattern, V2/96 has 90° x 60° coverage pattern, rotatable horn make it can be easily installed as vertical or horizontal.

## Specifications

Frequency Range (-10 dB) <sup>1</sup> :	60 Hz - 20 KHz
Frequency Response (±3dB) <sup>1</sup> :	65 Hz - 18 KHz
Sensitivity (1w@1m):	LF: 97 dB / HF: 108 dB Passive: 94 dB
Nominal Impedance:	8 Ohms
Peak Maximum SPL:	LF: 130 dB / HF: 132 dB Passive: 127 dB
Power Rating:	LF: 500W/ 1000W/ 2000W (Continuous <sup>2</sup> /Program/Peak) HF: 60W/ 120W/ 240W Passive: 500W/ 1000W/ 2000W
Coverage Pattern <sup>3</sup> :	V2/64: 60° x 40° (Rotatable) V2/96: 90° x 60° (Rotatable)
Dimension (H x W x D):	705 x 377x 495 mm
Net Weight:	25 Kg
LF Driver:	1 x 12", Φ2.5" voice coil
HF Driver:	1 x 1", Φ1.75" voice coil
Input Connectors:	2 x Neutrik® Speakon® NL4MP
Enclosure Construction:	15mm Premium birch plywood

<sup>1</sup>.In full-space.


<sup>2</sup>.IEC Filtered Pink Noise with 6 dB Crest Factor, 2 hours duration.

<sup>3</sup>.500Hz to 4kHz.

# Europa V2/64(96)

12", 2-Way, Full-Range Loudspeaker

## Dimension

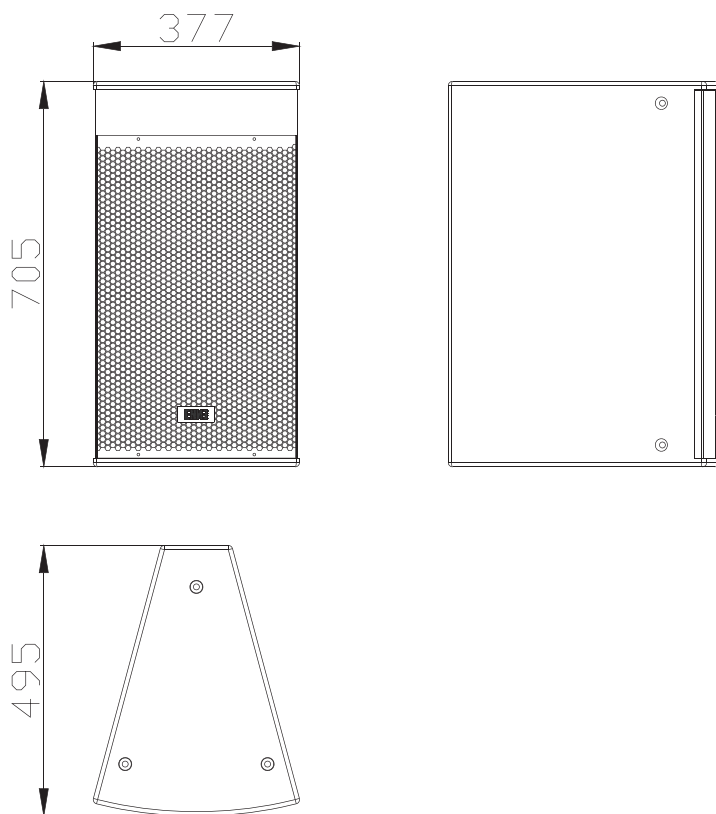

NO. ENNE 20190108 ver

ENNE Inc. (USA)  
650 N San Mateo Drive. San Mateo, California, USA  
CA 94401

ENNE Inc. (HK)  
香港九龍彌敦道345號宏利公積金大廈10樓1001-1003室  
Tel (852) 2301 1130  
Fax (852) 2301 1299

ENNE Inc. (CN)  
廣州市番禺區鐘村鎮鐘一村高沙工業區自編3號  
Tel (020) 8386 3459  
Fax (020) 8386 3550

**ENNE**