



KT312 Professional Speaker

3-way , 12"
bass-reflex speaker

Key Feature

- High-power capacity
- 4 x $\Phi 0.5$ high frequency compression driver
- The enclosure is constructed with top quality birch and coated in black rugged finish
- Fashion looking with dustproof protective steel grille
- High precision high quality crossover for optimal frequency response and performance in vocal range
- High frequency driver protected function prevent loudspeaker from overload without interrupting the performance
- 2 x M8 suspension points for maximum flexibility of installation



Specifications

System Type :	12" , 3-way, bass-reflex
Frequency Range ¹ (-10 dB) :	35Hz—20KHz
Frequency Response ¹ (± 3 dB) :	40Hz—18KHz
Sensitivity (@ 1w / 1m) :	90 dB
Nominal Impedance :	8 Ohms
Maximum SPL :	115 dB continuous (121 dB SPL peak)
Power Rating (Continuous ² /Program/Peak) :	250 W / 500 W / 1000 W
LF Driver :	1 x 12"
HF Driver :	4 x $\Phi 0.5$ "

Dimension

Dimension (H x W x D) :	350 mm x 570 mm x 333 mm
Net Weight :	18 kg
Input Connectors :	Binding post
Suspension/Mounting :	2 X M8 thread


1. In full-space.

2. IEC Filtered Pink Noise with 6dB Crest Factor, 2 hours duration.


KT312 Professional Speaker

3-way , 12" ,bass-reflex speaker


Frequency Response

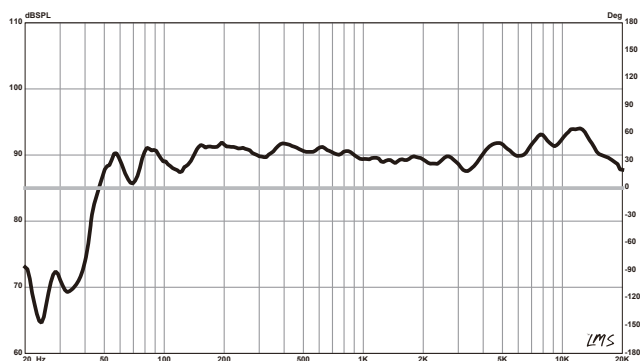

Impedance Response

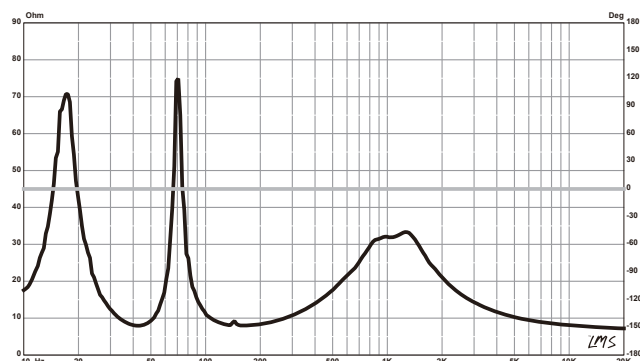

Dimension

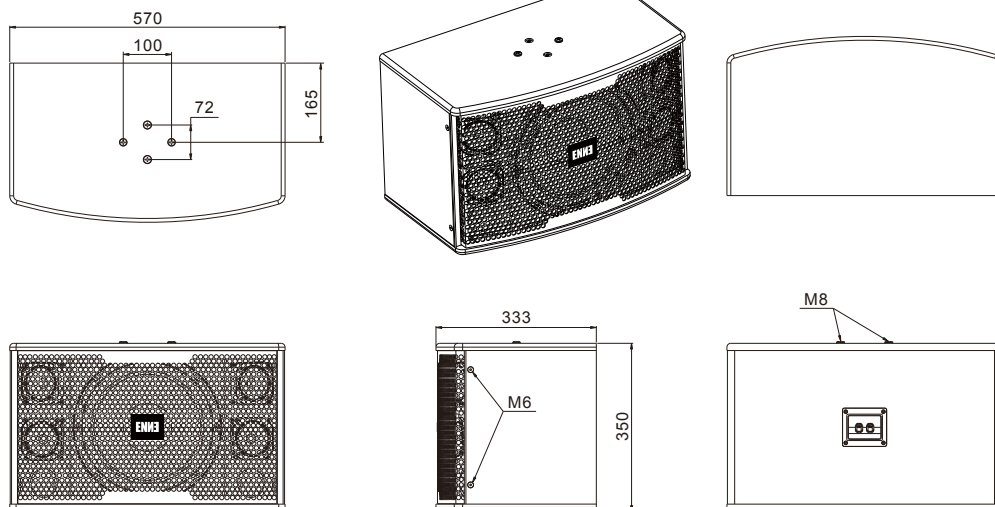

NO. ENNE 20191023 ver

ENNE Inc. (USA)
650 N San Mateo Drive. San Mateo, California, USA
CA 94401

ENNE Inc. (HK)
香港九龍彌敦道345號宏利公積金大廈10樓1001-1003室
Tel (852) 2301 1130
Fax (852) 2301 1299

ENNE Inc. (CN)
廣州市番禺區鐘村鎮鐘一村高沙工業區自編3號
Tel (020) 8386 3459
Fax (020) 8386 3550

ENNE