



ENNE KX712

Key Feature

- 12" woofer high-power driver capacity
- 1.75" annular polymer diaphragm compression driver
- The enclosure is constructed of top quality birch and coated in black rugged finish
- 90° x 60° coverage pattern for even and smooth response on and off axis
- Fashion looking with dustproof protective screen backed steel grille
- Precision engineered crossover for optimal power response and performance in the vocal midrange region
- Single position pole socket for applications requiring pole mounting
- It has been installed protects high frequency driver from excess power without interrupting the performance
- Rotatable ENNE logo for easy coherence to your application




Specifications :

System Type :	12" , 2-way, bass-reflex
Frequency Range (-10 dB) :	45 Hz – 20 KHz
Frequency Response (± 3 dB) :	50 Hz – 20 KHz
Sensitivity (1w@1m) :	98 dB
Nominal Impedance :	8 Ohms
Maximum SPL 1 :	125 dB (131 dB peak)
Power Rating :	500 W / 1000 W / 2000 W (Continuous 2 /Program/Peak)
Coverage Pattern :	90° x 60° (H x V) (Rotatable)
Dimensions (H x W x D) :	24.33 in x 13.78 in x 15.67 in (618mm x 350 mm x 398 mm)
Net Weight :	22Kg (48lbs)
LF Driver :	1 x 12"
HF Driver :	1 x 1.75"
Input Connectors :	2 x Speakon® NL4MP
Enclosure Construction :	Trapezoid, 15 mm, plywood
Suspension/Mounting :	Nineteen M10 Suspension Points

1、 Calculated based on power rating and sensitivity.

2、 IEC Filtered Pink Noise with 6 dB Crest Factor, 2 hours duration

Frequency Response

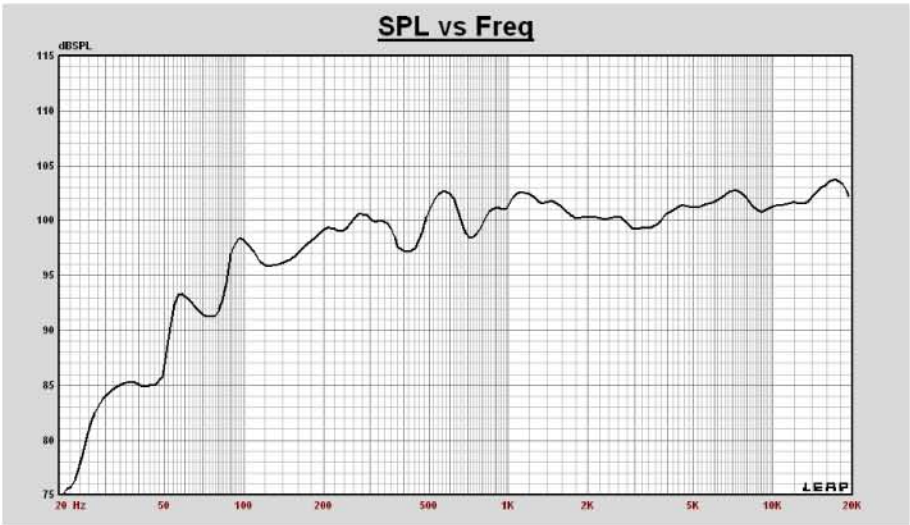

Dimensions

